



Lider

DESIGN & MANUFACTURE
OF ROAD TRAILERS

www.lider.fr



Lider

LIDER, based in LAVAL (53) since 1994 and occupying a 20,000 m² building, specialises in the design and manufacture of road trailers intended for all kinds of uses, for the general public from 500 kg or for professionals up to 3500 kg.

All our trailers are approved under European directive 2007/46/EC. This advance, in terms of quality and safety, certifies our products for sale in France as well as throughout Europe.



C O N T E N T S

| | |
|---|----|
| Craftsmanship & Know-how | 4 |
| Practical information | 6 |
| LUGGAGE & TIPPER TRAILERS | 8 |
| Luggage trailers | 10 |
| Wooden trailers | 12 |
| Robust trailers | 14 |
| Tippers | 16 |
| FLAT-BEDS & VEHICLE CARRIERS | 18 |
| Robust flat-beds | 20 |
| Flat-beds with wheels underneath | 22 |
| Motorcycle carriers | 24 |
| Car carriers | 26 |
| Low-bed trailers | 28 |
| VANS | 30 |
| VANS | 32 |
| ACCESSORIES | 34 |

*We reserve the right to make technical modifications to all our products with a view to constantly improving quality or following changes in the regulations.
On the other hand, we would like to point out that the photos appearing in this catalogue are not contractual.*




AT YOUR SIDE SINCE 1994



DESIGN & INNOVATION

With a Design Office entirely dedicated to creation and innovation, our product range is constantly evolving. All our trailers are approved according to European directive 2007/46/EC.

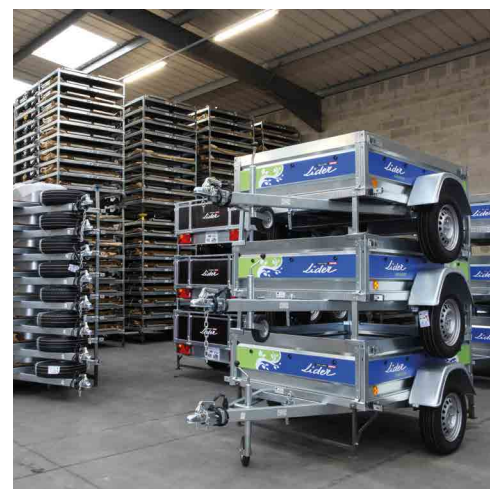


Our production site based in Laval (53) makes and despatches more than 45 000 trailers each year.

PRODUCTION & LOGISTICS



QUALITY & AFTER- SALES SERVICE

Using supplier and production monitoring, our service controls the quality of trailers and provides after-sales support with a wide range of spare parts.

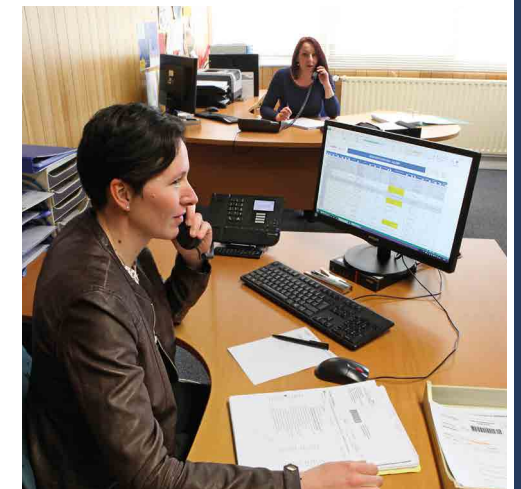

SALES & ADVICE



With a sales team and a network of dealers located throughout France, we provide you with a local service and advice.





USEFUL INFORMATION

Which licence for towing?
What's the coupling height?
What about a grey card?
Braked trailer?
Speed limits?
Checking the trailer?

Answer these questions before setting off!



WHICH LICENCE TO TOW?

A BE licence is required if the GAW of the trailer is greater than 750 kg and the sum of the GAW of the trailer and the car is greater than 3500 kg.

LICENCE
B

GAW \leq 3500 kg GAW \leq 750 kg
or GAW \leq 3500 kg GAW $>$ 750 kg
and GAW + GAW \leq 3500 kg

LICENCE
B^{CODE 96}

GAW \leq 3500 kg GAW $>$ 750 kg
and GAW + GAW \leq 4250 kg

LICENCE
BE

GAW \leq 3500 kg GAW \leq 3500 kg

GAW: maximum authorised loaded mass (gross authorised weight)

EW: empty weight

NEED A GREY CARD (REGISTRATION DOCUMENT)?

A grey card is mandatory for any trailer with a GAW over 500 kg. Using a trailer requires specific insurance in most cases. Most insurance covers a trailer not exceeding 750 kg if it is hitched to the insured vehicle, but if you have a problem with an unhitched trailer, the insurance does not cover it!

WHAT'S THE COUPLING HEIGHT?

The regulatory height of a loaded trailer is 43 cm \pm 3.5 cm (from the ground to mid-ball).

BRAKED TRAILER?



GAW \leq 750 kg
and EW \geq 2 x GAW



GAW $>$ 750 kg
or EW $<$ 2 x GAW

SPEED LIMITS

Article R413-8 of the Highway Code

The speed of vehicles whose gross authorised weight is greater than 3.5 tonnes or combinations of vehicles whose total authorised rolling weight is greater than 3.5 tonnes, with the exception of public transport vehicles, is limited to:

- **90 km/h on motorways.**
- **80 km/h on priority roads and signposted as such.** However, this maximum speed is raised to 90 km/h for vehicles whose total weight is less than or equal to 12 tonnes on roads with two carriageways separated by a central reservation.
- **80 km/h on other roads.** However, this maximum speed is lowered to 60 km/h for articulated vehicles or vehicles with trailers whose total weight is greater than 12 tonnes.
- **50 km/h in built-up areas.**

Always remember that the braking distances of a vehicle plus trailer are much longer and watch out for yawing at high speeds. Example: a combination consisting of a car and a 1000 kg trailer travelling at 50 km/h needs 25 to 30% more braking distance, or about 20 m instead of 15 m for a car on its own.

BEFORE SETTING OFF

Check your tyre pressure. Correct inflation ensures good roadholding and a longer tyre life. Also check wheel tightening.

Check your coupling, namely the ball and ball joint (*wear, lubrication*), as well as safety elements (*locking, cables etc*).

Check load distribution. To do this, make sure that the weight on the coupling ball is neither too low (*risk of yawing*), nor too great (*limited by the capacity of the coupling*). This weight should represent approximately 5 to 10% of the GAW.

Check the signals. A malfunction of the lights can result from a bad connection to the 7 or 13 pin socket, a damaged cable or burnt-out bulb.

Check periodically, approximately every 500 km, **the tightening** of the trailer's screws. Vibration can sometimes cause loosening.

Routine maintenance is described in the use and maintenance manual supplied with each trailer.

LUGGAGE & TIPPER trailers

by *Lider*

Whether for occasional or intensive use, for individuals or professionals, our wide range of trailers will meet your needs.



LUGGAGE TRAILERS

7
MODELS



WOODEN TRAILERS

5
MODELS



ROBUST TRAILERS

8
MODELS



TIPPERS

8
MODELS



NEW FOR 2020



Robust 40393



Robust 40395

LUGGAGE TRAILERS

by LIDER

Our range of luggage trailers is perfect for transporting materials, intensive DIY activities or regular work, gardening and disposing of your green waste, travelling on weekends and summer holidays... Lider trailers are there for you every day.



7 models available from 1.50 m to 2.50 m



CADIX 205x132x39

STRONG POINTS



OPTIONS

Equip your trailer

Cowl (h.13cm min 23cm max)

Roof rack

Carry bars (compatible with flat tarpaulin)

Flat tarpaulin

High tarpaulin

Mesh extensions

Double rails

Perforated sheet metal extensions

Ladder rack

Spare wheel underneath (39550)

Spare wheel on front rail (other models)



information at www.lider.fr

| FEATURES | ALICANTE 39211 | SARAGOS 39220 | VENISE 39300 | CADIX 39310 | FLORENCE 39330 | PALERME 39331 | TOLEDE 39550 |
|-----------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------|
| GAW (kg) | 500/600/650/750 | 500/600/650/750 | 500/600/650/750 | 500/600/650/750 | 500/600/650/750 | 500/600/650/750 | 500/600/650/750 |
| Min empty weight (kg) | 136 | 156 | 168 | 168 | 228 | 176 | 305 |
| Useful dimensions (cm) | 150 x 100 x 39 | 170 x 122 x 39 | 205 x 122 x 39 | 205 x 132 x 39 | 233 x 132 x 39 | 233 x 132 x 39 | 253 x 147 x 30 |
| Overall dimensions (cm) | 263 x 152 | 283 x 174 | 318 x 174 | 318 x 184 | 346 x 184 | 346 x 184 | 365 x 159 |
| Wheels | 165/70R13 | 165/70R13 | 165/70R13 | 165/70R13 | 165/70R13 | 165/70R13 | 155/70R13 |
| Axle resistance (kg) | 750 | 750 | 750 | 750 | 2 x 750 | 750 | 2 x 750 |
| Box type | tipping | tipping | tipping | tipping | fixed | tipping | fixed |
| Wooden | non-slip floor | non-slip floor | non-slip floor | non-slip floor | non-slip floor | non-slip floor | non-slip floor |
| Prop/Jockey wheel Ø48 | jockey wheel | jockey wheel | jockey wheel | jockey wheel | jockey wheel | jockey wheel | jockey wheel |
| Folding rail(s) | front and rear | front and rear | front and rear | front and rear | front and rear | front and rear | 4 sides |
| Galvanised V-shaped drawbar | □ | □ | □ | □ | □ | □ | □ |
| Flat tarpaulin | option | option | option | option | option | option | option |
| High tarpaulin | height option 80cm | height option 80cm | height option 80cm | height option 80cm | height option 80cm | height option 80cm | |
| Spare wheel | option | option | option | option | option | option | option |
| Spare wheel support | option | option | option | option | option | option | option |
| Set of double side rails | height option 39cm | height option 39cm | height option 39cm | height option 39cm | height option 39cm | height option 39cm | height option 30 cm |
| Cowl/Cowl bars | options | options | options | options | options | options | |
| Mesh extensions | height option 50cm | height option 50cm | height option 50cm | height option 50cm | height option 50cm | height option 50cm | height option 60cm |
| Carry bars | option | option | option | option | option | option | |
| Ladder rack | height option 55cm | height option 55cm | height option 55cm | height option 55cm | height option 55cm | height option 55cm | height option 55cm |
| Perforated sheet metal extensions | height option 35cm | height option 35cm | height option 35cm | height option 35cm | height option 35cm | height option 35cm | |

We reserve the right to make technical modifications to all our products in a constant search for quality improvement or following changes in the regulations.

TRAILERS WOOD

by *Lider*

Lider, the leading manufacturer of wooden trailers, offers a complete range with accessories to support you in your daily work: gardening, various types of transport, DIY.



5 models available
from 2 m to 2.50 m



39440
201x133x40



39450
with perforated sheet metal extension
option
251x133x40



34470
with tailgate option
251x133x40



34480
251x133x40



39440
201x133x40

STRONG POINTS



OPTIONS

Equip your trailer

Flat tarpaulin



High tarpaulin



Spare wheel and support



Ladder rack



Perforated sheet metal extensions



Mesh extensions



Tailgate
1m20 + rear props



information at www.lider.fr

| FEATURES | TRAILER 39440 | TRAILER 39460 | TRAILER 39450 | TRAILER 34470 | TRAILER 34480 |
|-------------------------|--|------------------|------------------|------------------|---------------------|
| GAW (kg) | 500/600/650/750 | 500/600/650/750 | 500/600/650/750 | 750 | 1300/1200/1100/1000 |
| Min empty weight (kg) | 195 | 214 | 250 | 255 | 320 |
| Useful dimensions (cm) | 201 x 133 x 40 | 251 x 133 x 40 | 251 x 133 x 40 | 251 x 133 x 40 | 251 x 133 x 40 |
| Overall dimensions (cm) | 322 x 182 | 372 x 182 | 372 x 184 | 375 x 182 | 386 x 184 |
| Wheels | 155/70R13 | 155/70R13 | 155/70R13 | 155R13 | 155/70R13 |
| Axle resistance | 750kg | 750kg | 2 x 750 Kg | 750kg | 2 x 750 Kg |
| Box type | tipping | tipping | fixed | tipping | fixed |
| jockey wheel | Ø 48 | Ø 48 | Ø 48 | Ø 60 | Ø 60 |
| Folding rail(s) | front and rear | front and rear | front and rear | front and rear | front and rear |
| Inertia braking | | | | yes | yes |
| Options | flat tarpaulin - high tarpaulin 80 cm - ladder rack spare wheel - spare wheel support perforated sheet metal extensions 35 cm mesh extensions 60 cm(39440) or 70 cm (39450 to 34480) tailgate maximum load 300 Kg 1.20 m with rear props | | | | |

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.

TRAILERS ROBUST

by *Lider*

The Robust range is intended for intensive use, in particular for landscapers, communities, farmers, etc. It's perfect for intermediate use between private individuals and professionals.



8 models available
from 2 m to 3 m



39530

250x125x110



39350

200x134x50



32390

200x134x50



34392

with tailgate option
253x134x50



38398

300x150x50



New

40393

253x134x50



New

40395

253x134x50

OPTIONS

EQUIP YOUR TRAILER

Flat tarpaulin



High tarpaulin



Ladder rack



Mesh extensions



Perforated sheet metal extensions



Tailgate 1m20 + rear props



Spare wheel with support



Carry bars (compatible with flat tarpaulin)



information at www.lider.fr



39394

253x134x50

STRONG POINTS



homologation CE

| FEATURES | GRANADA 39530 | ROBUST 39350 | ROBUST 32390 | ROBUST 39394 | New ROBUST 40393 | ROBUST 34392 | New ROBUST 40395 | ROBUST 38398 |
|---|--------------------|--------------------|-------------------|--------------------|---------------------------|------------------------|-----------------------------|---------------------------------------|
| GAW (kg) | 500/600 650/750 | 500/600 650/750 | 750 | 500/600 650/750 | 500/600 650/750 | 1300/1200 1100/1000 | 1500/1300 1200/1100/1000 | 2500/2000/1900 1800/1700/1600/1500 |
| Min empty weight (kg) | 265 | 206 | 230 | 274 | 240 | 290 | 340 | 460 |
| Useful dimensions (cm) | 250 x 125 x 110 | 200 x 134 x 50 | 200 x 134 x 50 | 253 x 134 x 50 | 253 x 134 x 50 | 253 x 134 x 50 | 253 x 134 x 50 | 300 x 150 x 50 |
| Overall dimensions (cm) | 326 x 173 | 318 x 184 | 310 x 184 | 372 x 185 | 372 x 185 | 386 x 184 | 386 x 185 | 444 x 203 |
| Wheels | 155/70R13 | 155/70R13 | 155R13 | 155/70R13 | 155/70R13 | 165R13C | 155/70R13 | 165R13C |
| Axle resistance | 750kg | 750kg | 750kg | 2 x 750 kg | 750kg | 1300 kg | 2 x 750 kg | 2 x 1300 kg |
| Box type | fixed | tipping | tipping | fixed | tipping | tipping | fixed | fixed |
| Prop / Jockey wheel | prop | Ø48 | Ø48 | Ø48 | Ø48 | Ø48 | Ø60 | Ø60 |
| Adjustable galvanised | straight | V-shaped | V-shaped | V-shaped | V-shaped | V-shaped | V-shaped | V-shaped |
| Inertia braking | no | no | yes | no | no | yes | yes | yes |
| Ladder rack | | option | option | option | option | option | option | option |
| Flat tarpaulin | option | option | option | option | option | option | option | option |
| Upper grill | option | | | | | | | |
| High tarpaulin | | option (40 cm) | option (40 cm) | option (80 cm) | option (80 cm) | option (80 cm) | option (80 cm) | option (100 cm) |
| Spare wheel | option | option | option | option | option | option | option | option |
| Spare wheel support | option | option | option | option | option | option | option | option |
| Mesh extensions | | option (ht 60 cm) | option (ht 60 cm) | option (ht 60 cm) | option (ht 60 cm) | option (ht 60 cm) | option (ht 60 cm) | option (ht 60 cm) |
| Perf sheet metal extensions ht 35 cm | | | | option | option | option | option | |
| Carry bars | | option | option | option | option | option | option | |
| Tailgate and rear props* | | | | | option Max load 300 kg | | | option Max load 1000 kg |

* Not compatible with perforated sheet metal extension

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.

TIPPERS

by *Lider*

We offer a complete range of tippers. Essential equipment for your work sites, our general public and professional tippers meet all your requirements.



8 models available
from 2.50 m to 4 m



39560
253x147x30



39600PE
256x148x30



4 lashing handles inside

smooth floor

removable posts and rails

double action manual pump

hot-dip galvanised V-shaped drawbar

galvanised steel rails

galvanised half-mudguard

hot-dip galvanised welded frame and body

jockey wheel inside the drawbar

39580
256x148x30

STRONG POINTS



34352
253x134x50



39610PE
322x170x35



39612PE
322x170x35



39614PE
402x190x35

LED lights
(also on 39610PE and 39612PE)




OPTIONS

Equip your trailer

Spare wheel and support



Loading ramps (props necessary)



Double rail set (39560)



Mesh extensions



Ladder rack



Rear props



Ramps with support and props (34352)



information at www.lider.fr


| FEATURES | 39560 | 34352 | 39580 | 39600 | 39600PE | 39610PE | 39612PE | 39614PE |
|-------------------------|-----------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------|-------------------|
| Type | Tipper | Tipper | Tipper | Tipper | Tipper | Tipper | Tipper | Tipper |
| GAW (kg) | 750/650/600/500 | 1500/1400/1300/1200/1100/1000 | 1500/1400/1300/1200/1100/1000 | 2500/2000/1900/1800/1700/1600 | 2500/2000/1900/1800/1700/1600 | 2500/2000/1900/1800/1700/1600 | 3500/3000/2700 | 3500/3000/2700 |
| Min empty weight (kg) | 335 | 450 | 500 | 550 | 590 | 780 | 850 | 970 |
| Useful dimensions (cm) | 253 x 147 x 30 | 253 x 134 x 50 | 256 x 148 x 30 | 256 x 148 x 30 | 256 x 148 x 30 | 322 x 170 x 35 | 322 x 170 x 35 | 402 x 190 x 35 |
| Overall dimensions (cm) | 365 x 159 | 390 x 184 | 385 x 160 | 385 x 160 | 385 x 160 | 476 x 184 | 479 x 184 | 559 x 204 |
| Wheels | 155/70R13 | 155/70R13 | 155/70R13 | 155R13C | 155R13C | 165R14C | 185R14C | 185R14C |
| Axle resistance (kg) | 2 x 750 | 2 x 750 kg | 2 x 750 | 2 x 1300 | 2 x 1300 | 2 x 1300 | 2 x 1800 | 2 x 1800 |
| Floor height (cm) | 65 | 51 | 69 | 71 | 71 | 72 | 72 | 72 |
| jockey wheel | Ø 48 | Ø 60 | Ø 60 | Ø 60 | Ø 60 | Ø 60 | Ø 60 | Ø 60 |
| Pump | Manual | Manual | Manual | Manual | Electric | Electric + manual | Electric + manual | Electric + manual |
| Inertia braking | | yes | yes | yes | yes | yes | yes | yes |
| Ramp housing | | | | | | yes | yes | yes |
| LED lights | | | | | | yes | yes | yes |

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.

THE FLAT-BEDS & VEHICLE CARRIERS

by *Lider*

Our ranges of flat-beds and vehicle carriers are perfect for transporting all types of rolling vehicles: quad bikes, motorcycles, construction or maintenance equipment, cars, machinery...




**ROBUST
FLAT-BEDS**

**8
MODELS**



**FLAT-BEDS
WITH
WHEELS UNDER-
NEATH**

**11
MODELS**

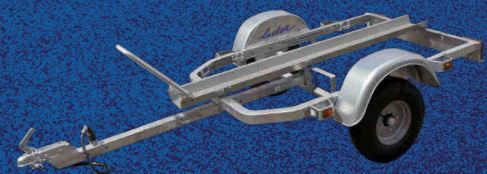

**MOTORCYCLE
CARRIERS**

**3
MODELS**



**CAR
CARRIERS**

**5
MODELS**



**LOW-BED
CARRIERS**

**6
MODELS**



NEW FOR 2020



40375



Optima adjustable drawbar
(features on model 40685L)

FLAT-BEDS ROBUST

by *Lider*

Both individuals and professionals alike will appreciate the many advantages offered by this range: reliability, ease and variety of use.
The many options mean you can equip your flat-bed according to your needs.



8 models available
from 2.50 m to 4.50 m



Change of useful dimensions

- Width: + 10 cm for ref. 40370, 40375, 40380 and 40385
- Length: + 30 cm for ref. 40386



STRONG POINTS



OPTIONS

Mesh extension end caps
(for mounting on a platform with
rails + mesh extensions)



Set of 3 rails



Mesh extensions



Locking bar



Spare wheel
with support



Winch with support



information at www.lider.fr



| | New | New | New | New | New | New | | |
|----------------------------|-------------------|-------------------|---|-------------------|------------------------|------------------------|--|--|
| | FLAT-BED 40360 | FLAT-BED 40370 | FLAT-BED 40375 | FLAT-BED 40380 | FLAT-BED 40385 | FLAT-BED 40386 | LOWERING FLAT-BED 36830 | FLAT-BED EXTERNAL WHEELS 34780 |
| GAW (kg) | 500/600/650/750 | 500/600/650/750 | 750 | 1000 | 1350/1200 1100/1000 | 1600/1500 1400/1300 | 1500/1400/1300/ 1200/1100/1000 | 3500/3000/2700 |
| Min empty weight (kg) | 230 | 250 | 295 | 315 | 370 | 440 | 420 | 760 |
| Useful dimensions (cm) | 254 x 161 x 10 | 304 x 171 x 10 | 304 x 171 x 10 | 304 x 171 x 10 | 304 x 171 x 10 | 350 x 180 x 12 | 350 x 180 x 15 | 450 x 190 x 18 |
| Overall dimensions (cm) | 375 x 213 | 425 x 223 | 431 x 223 | 431 x 226 | 435 x 226 | 482 x 234 | 492 x 235 | 599 x 243 |
| Wheels | 155/70R13 | 155/70R13 | 155/70R13 | 185/70R13 | 165R14C | 185R14C | 195/50R13C | 195R14C |
| Axle resistance (kg) | 1 x 750 | 1 x 750 | 1 x 750 | 1 x 1000 | 1 x 1350 | 1 x 1600 | 1 x 1500 | 2 x 1800 |
| Floor height / ground (cm) | 45 | 45 | 46 | 46 | 48 | 48 | 40 | 55 |
| Inertia braking | | | yes | yes | yes | yes | yes | yes |
| jockey wheel | Ø48 | Ø48 | Ø48 | Ø60 | Ø60 | Ø60 | Ø60 | Ø60 |
| Tipping handle | 2 | 2 | 2 | 2 | 2 | 2 | | 2 |
| Options | | | Set of 3 rails, 40 cm high Mesh extensions, 70 cm high End piece for mesh extensions (for mounting on bed with rails) Locking bar (individual) Spare wheel - Spare wheel support Towing winch with support | | | | Mesh extensions h. 70 cm Locking bar (individual) Spare wheel Spare wheel support | Extra locking bar Spare wheel Spare wheel support Towing winch + support |
| Series equipment | | | | | | | | Wooden floor locking bar Hydraulic tipping+tailboard |

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.

FLAT-BEDS WHEELS UNDERNEATH

by *Lider*

Our "wheels underneath" flat-bed trailers offer great transport options for various vehicles and green-space equipment. Check out the many accessory options that mean you can customise your platform.




11 models available
from 3 m to 5 m



32670
506x215




New
40685L
406x215

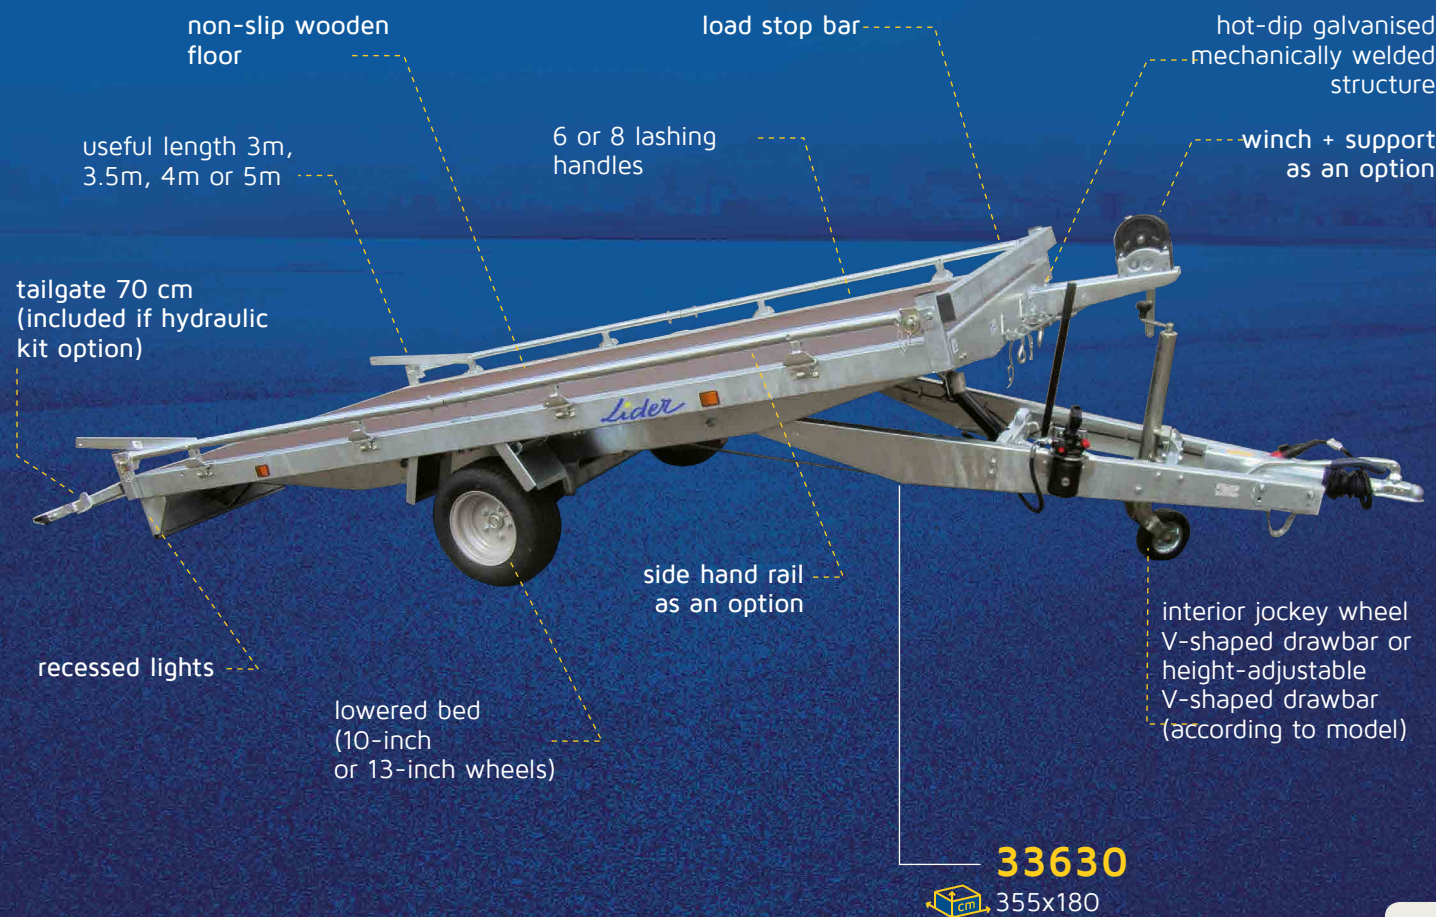

33630
355x180

STRONG POINTS

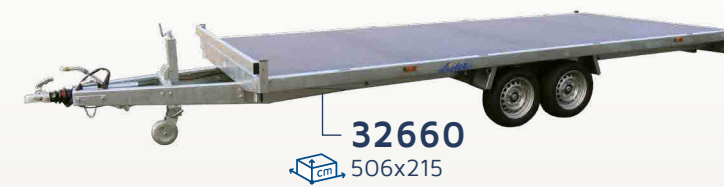

32660
506x215



34622
with alu rails option
306x170

New items are available
from early 2020

| FEATURES | 34620 | 34622 | 33630 | 34632 | 32650 |
|-------------------------------|--|-----------------------------------|----------------------------------|----------------------------------|--|
| GAW (kg) | 2700/2500/2000/1900 1800/1700/1600/1500 | 1500/1400/1300/ 1200/1100/1000 | 1500/1400/1300 1200/1100/1000 | 2000/1900/1800/1700 1600/1500 | 2500/2000/1900/ 1800/1700/1600/1500 |
| Min empty weight (kg) | 400 | 370 | 370 | 430 | 600 |
| Useful dimensions (cm) | 306 x 170 | 306 x 170 | 355 x 180 | 355 x 180 | 406 x 215 |
| Overall dimensions (cm) | 438 x 176 | 438 x 176 | 490 x 186 | 490 x 186 | 556 x 221 |
| Wheels | 195/55-10C | 155/70R13 | 195/55-10C | 195/55-10C | 195/55-10C |
| Axle resistance (kg) | 2 x 1300 | 2 x 750 | 1 x 1500 | 2 x 1000 | 2 x 1300 |
| Floor height / ground (cm) | 61 | 68 | 63 | 63 | 61 |
| Adjustable galvanised | V-shaped | V-shaped | V-shaped | V-shaped | V-shaped |
| Coupling height / ground (cm) | | | | | |
| jockey wheel | Ø60 | Ø60 | Ø60 | Ø60 | Ø60 |
| Series equipment | | | load stop - 6 lashing handles | | load stop - 8 lashing handles |

New items are available
from early 2020

| FEATURES | 40655L | 32670 | 32680 | 40685L | 32660 | 40665L |
|-------------------------------|---------------------------------------|---------------------------------------|-------------------------------|----------------|----------------|----------------|
| GAW (kg) | 2500/2000/1900/1800 1700/1600/1500 | 2500/2000/1900/1800 1700/1600/1500 | 3500/3000/2700 | 3500/3000/2700 | 3500/3000/2700 | 3500/3000/2700 |
| Min empty weight (kg) | 660 | 670 | 700 | 800 | 770 | 870 |
| Useful dimensions (cm) | 406 x 215 | 506 x 215 | 406 x 215 | 406 x 215 | 506 x 215 | 506 x 215 |
| Overall dimensions (cm) | 580 x 221 | 656 x 221 | 558 x 221 | 587 x 221 | 658 x 221 | 687 x 221 |
| Wheels | 195/55-10C | 195/55-10C | 195/50R13C | 195/50R13C | 195/50R13C | 195/50R13C |
| Axle resistance (kg) | 2 x 1300 | 2 x 1300 | 2 x 1800 | 2 x 1800 | 2 x 1800 | 2 x 1800 |
| Floor height / ground (cm) | 61 | 61 | 65 | 65 | 65 | 65 |
| Adjustable galvanised | optima drawbar | V-shaped | V-shaped | optima drawbar | V-shaped | optima drawbar |
| Coupling height / ground (cm) | 29 to 66 | | | 33 to 73 | | 33 to 73 |
| jockey wheel | Ø 60 | Ø 60 | square 70 | Ø 73 | square 70 | Ø 73 |
| Series equipment | | | load stop - 8 lashing handles | | | |

Options common to all models: aluminium rails ht 35 cm / spare wheel / spare wheel support / winch + support / folding handrail / chock + rails.

Options for models 34620 - 34622: mesh extensions (+ compulsory side rails) = ht 70 cm / aluminium ramps / ramp housing kit + rear props (factory-fitted).

Options for models 33630 - 34632: hydraulic tipping kit + tailgate (factory fitted) / mesh extensions (+ mandatory side panels) = ht 60 cm.

Options for models 32650 - 40655L - 32670 - 32680 - 40685L - 32660 - 40665L:

hydraulic tipping kit + tailgate (factory fitted) / mesh extensions (+ mandatory side rails) = ht 60 cm / aluminium ramps + rear props (standard ramp housing) / ring for adjustable drawbar.

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



OPTIONS

Equip your trailer

Chock + rails



Spare wheel with support



Mesh extensions
(combined with rails)



Towing winch
with support




Aluminium ramps
and rear props



MOTORCYCLE CARRIER

by *Lider*


Whether for fun or competition, quad and motorcycle enthusiasts will appreciate this highly adaptable range. Option of 1 to 3 rails depending on the model and accessories: loading ramp, jockey wheel, spare wheel...

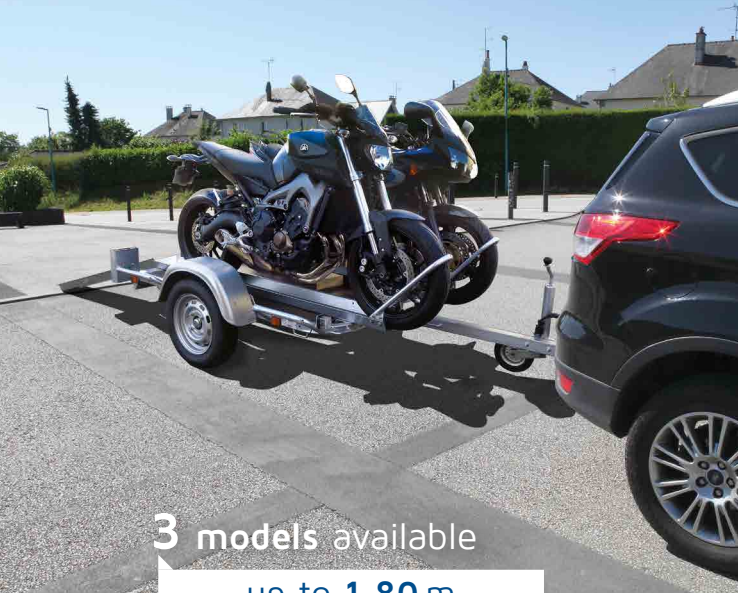

3 models available
up to 1.80 m



34400E
with 1 rail option
173x115

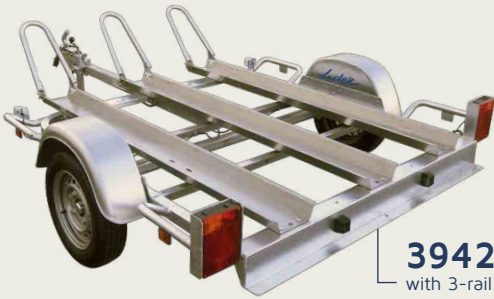


39420
with 3-rail option
178x167



Storage of the loading ramp



39401
with floor options
+ quad kit
178x126

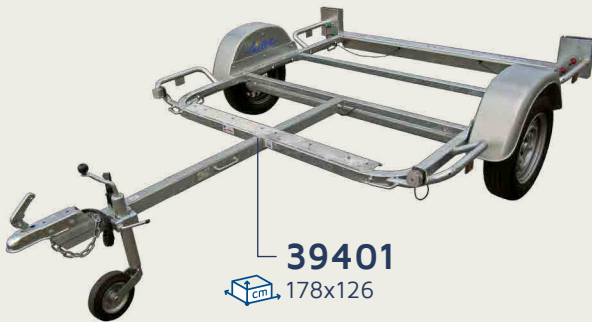


39401
178x126


OPTIONS

Equip your trailer

Rail with hoop



Loading ramp



jockey wheel



non-slip wooden floor



Spare wheel with support



Quad kit
(includes: guardrails
+ 2 ramps, floor not included)



information at www.lider.fr

transporting 2 large motorcycles possible from 39401

modular trailer

protection and lashing bars

galvanised chassis, drawbar, axle, rails, ramp

galvanised welded chassis across the whole range

recessed lights

large loading ramp

spare wheel under the chassis

easy, open access across the whole width

wooden floor 12 mm (as an option)

lowered chassis

galvanised fully-covering mudguard

lashing for straps under the chassis

39401

178x126

STRONG POINTS



| FEATURES | MOTORCYCLE CARRIER 34400E | MOTORCYCLE CARRIER 39401 | MOTORCYCLE CARRIER 39420 |
|-----------------------------------|---------------------------|--------------------------|--------------------------|
| GAW (kg) | 500 | 500/600/650/750 | 500/600/650/750 |
| Min empty weight (kg) | 85 | 130 | 140 |
| Useful dimensions (cm) | 173 x 115 | 178 x 126 | 178 x 167 |
| Overall dimensions (cm) | 297 x 156 | 312 x 168 | 312 x 209 |
| Wheels | 5.00 x 10 | 155/70R13 | 155/70R13 |
| Axle resistance (kg) | 500 | 750 | 750 |
| Useful height / ground (cm) | 47 | 41 | 41 |
| Tilting chassis | no | no | no |
| Lowered chassis | | yes | yes |
| Adjustable galvanised | straight | straight | straight |
| Number of rails (12 kg per rail) | 1 or 2 as an option | 1 or 2 as an option | 1 to 3 as an option |
| Loading ramp (9 kg) | option | option | option |
| jockey wheel | option | Ø48 | Ø48 |
| Spare wheel with support | option | option | option |
| Non-slip wooden floor | | option | option |
| Quad kit (useful dim. 199x124 cm) | | option | |

CAR CARRIER

by *Lider*

Our range of car carriers equipped with ramps is designed to transport light and utility vehicles.



5 models available
from 1300 to 2700 kg



39750
361x185x11



39760
394x190x14


hydraulic tipping kit option

large series ramps



39770
361x185x11

STRONG POINTS

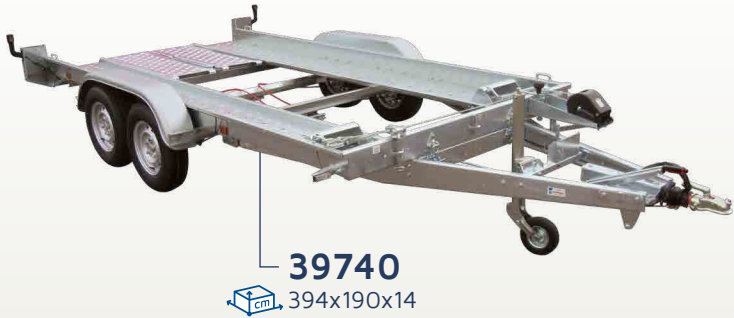

39740
394x190x14



large ramps storage
39740 and 39760



39790
450x203x6

OPTIONS

Equip your trailer

Hydraulic tipping kit



Removable wooden floor



Spare wheel and support



Additional wheel chock



*Large ramps kit for loading vehicles with an attack angle of less than 23°



All chassis are designed to accommodate wheel straps (not provided)



*option only for ref. 39750 and 39770

information at www.lider.fr

| FEATURES | CAR CARRIER 39750 | CAR CARRIER 39770 | CAR CARRIER 39740 | CAR CARRIER 39760 | CAR CARRIER WHEELS UNDER-NEATH 39790 |
|-----------------------------|--|---------------------|--|-------------------|---|
| GAW (kg) | 1300/1200/1100/1000 | 1600/1500/1400/1300 | 2000/1900/1800/1700 1600/1500 | 2500 | 2700 |
| Min empty weight (kg) | 370 | 430 | 575 | 580 | 640 |
| Useful dimensions (cm) | 361 x 185 x 11 | 361 x 185 x 11 | 394 x 190 x 14 | 394 x 190 x 14 | 450 x 203 x 6 |
| Overall dimensions (cm) | 540 x 237 | 540 x 237 | 547 x 237 | 547 x 237 | 600 x 209 |
| Wheels | 165R13C | 195/50R13C | 165R13C | 165R13C | 165R13C |
| Axle resistance (kg) | 1 x 1300 | 1 x 1600 | 2 x 1000 | 2 x 1300 | 2 x 1350 |
| Adjustable galvanised | V-shaped | V-shaped | V-shaped | V-shaped | V-shaped |
| Useful height / ground (cm) | 47 | 44 | 46 | 46 | 71 |
| jockey wheel | Ø60 | Ø60 | Ø60 | Ø60 | Ø60 |
| Series equipment | 2 fixed ramps 43 x 30 cm Tipping springs 2 wheel chocks Winch + support | | 2 large removable ramps 43 x 120 cm Tipping springs 2 wheel chocks Winch + support | | 2 ramps 2 FR props 2 wheel chocks Winch with support |
| Options | Spare wheel Spare wheel support Additional wheel chock Hydraulic kit Large ramps kit | | Spare wheel Spare wheel support Hydraulic kit Additional wheel chocks Wooden floor | | Spare wheel Spare wheel support Plywood floor (for the flat part) Additional wheel chock |

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.

LOW-BED TRAILER

by *Lider*

Our range of low-bed trailers offers building, public works, agricultural professionals and landscapers the possibility of transporting their mini-excavator type of construction equipment.



6 models available
from 3 m to 3.50 m



New
40860
300x145x8/18




New
40905L
350x170x8/18



40865L
300x145x8/18
New
optima adjustable
drawbar



40900
350x170x8/18
New

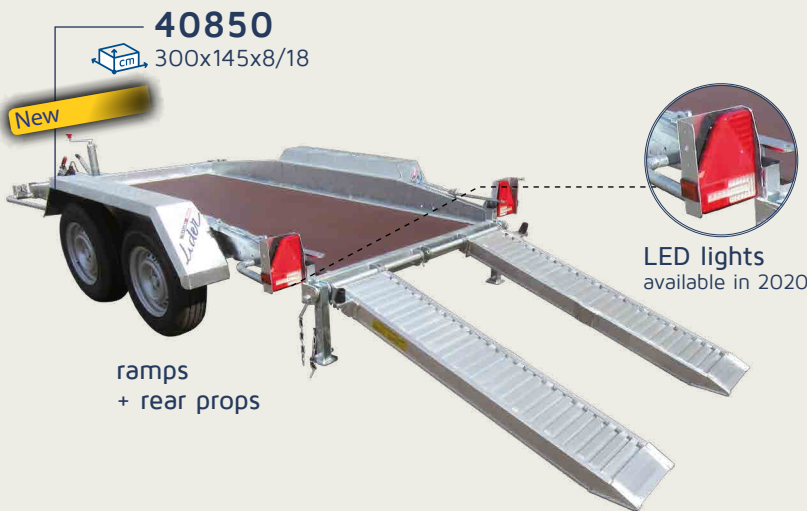

40850
300x145x8/18
New
ramps
+ rear props
LED lights
available in 2020

OPTIONS Equip your trailer

Spare wheel
+ support



Chain kit



Lashing ring



Step-
down
unit



Stop bar



information at www.lider.fr



40850
300x145x8/18

STRONG POINTS



New range available in
2020
(please ask us)

| FEATURES | New LOW-BED TRAI- LER 40850 | New LOW-BED TRAI- LER 40855L | New LOW-BED TRAI- LER 40860 | New LOW-BED TRAI- LER 40865L | New LOW-BED TRAI- LER 40900 | New LOW-BED TRAI- LER 40905L |
|-------------------------------|--|---------------------------------------|--------------------------------------|---------------------------------------|--------------------------------------|---------------------------------------|
| | 2500/2000/1900 1800/1700/1600/1500 | 2500/2000/1900 1800/1700/1600/1500 | 3500/3000/2700 | 3500/3000/2700 | 3500/3000/2700 | 3500/3000/2700 |
| GAW (kg) | 2500/2000/1900 1800/1700/1600/1500 | 2500/2000/1900 1800/1700/1600/1500 | 3500/3000/2700 | 3500/3000/2700 | 3500/3000/2700 | 3500/3000/2700 |
| Min empty weight (kg) | 530 | 570 | 610 | 690 | 670 | 720 |
| Useful dimensions (cm) | 300 x 145 x 8/18 | 300 x 145 x 8/18 | 300 x 145 x 8/18 | 300 x 145 x 8/18 | 350 x 170 x 8/18 | 350 x 170 x 8/18 |
| Overall dimensions (cm) | 463 x 205 | 522 x 205 | 465 x 205 | 528 x 205 | 525 x 230 | 574 x 230 |
| Wheels | 175R14C | 175R14C | 195R14C | 195R14C | 195R14C | 195R14C |
| Axle resistance (kg) | 2 x 1300 | 2 x 1300 | 2 x 1800 | 2 x 1800 | 2 x 1800 | 2 x 1800 |
| Adjustable galvanised | V-shaped | optima drawbar | V-shaped | optima drawbar | V-shaped | optima drawbar |
| Coupling height / ground (cm) | | 25 to 89 | | 33 to 96 | | 33 to 96 |
| Floor height / ground (cm) | 49 | 49 | 52 | 52 | 52 | 52 |
| jockey wheel | Ø60 | Ø60 | Ø60 | Ø73 | Ø60 | Ø73 |
| Series equipment | Wooden floor – LED lights Alu ramps 1m60 – Rear props | | | | | |
| Options | Stop bar – Spare wheel – Spare wheel support Lashing chains – Adjustable drawbar ring – Voltage step-down 24V-12V | | | | | |

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.

THE V A N S

by *Lider*

Ideal for transporting materials in complete safety, our vans provide the perfect solution for your gear: quads, motorcycles, equipment for fairs, shows and markets.
Loading can be made easier thanks to our tailgate and side door options.



5
MODELS



VAN S

by *Lider*

The whole range of vans offers the advantage of protecting goods transported thanks to its waterproofness and secure closure.
More than just a means of transport, it also means you can store material to make it a true partner for professionals.
It's also ideal for motorhome users.



interior
lighting
via ceiling light

aluminium profiles

smooth plywood
internal walls

2-point closure
with key and lock

jockey wheel

door stop

non-slip internal floor
15 mm

hot-dip galvanised
welded chassis

6 recessed internal rings

props

38960
260x142x162

STRONG POINTS



OPTIONS

Equip your trailer

Spare wheel
+ support



Rail/Lashing ring(s)



1 rail

2 rails

3 rails



Tailgate



Side door
width 60 cm with step



information at www.lider.fr

| FEATURES | VAN 39920 | VAN 38930 | VAN 38970 | VAN 38960 | VAN 38950 |
|--------------------------------|---|-----------------|-----------------|---------------------|----------------------------------|
| GAW (kg) | 750/650/600/500 | 750 | 750 | 1300/1200/1100/1000 | 2000/1900/1800 1700/1600/1500 |
| Min empty weight (kg) | 358 | 391 | 465 | 490 | 630 |
| Interior dimensions LxWxH (cm) | 220 x 135 x 143 | 220 x 135 x 143 | 260 x 142 x 162 | 260 x 142 x 162 | 300 x 150 x 178 |
| Doorway(s) WxH (cm) | 125 x 137 | 125 x 137 | 132 x 156 | 132 x 156 | 140 x 172 |
| with tailgate WxH (cm) | 113 x 134 | 113 x 134 | 120 x 153 | 120 x 153 | 128 x 169 |
| Overall dimensions LxWxH (cm) | 339 x 184 x 199 | 356 x 184 x 199 | 416 x 191 x 220 | 417 x 191 x 220 | 457 x 199 x 235 |
| Wheels | 155/70R13 | 155R13 | 155R13 | 165R13C | 155R13C |
| Axle resistance (kg) | 1 x 750 | 1 x 750 | 1 x 750 | 1 x 1300 | 2 x 1100 |
| Floor height / ground (cm) | 51 | 51 | 52 | 52 | 52 |
| jockey wheel | Ø48 | Ø48 | Ø48 | Ø60 | Ø60 |
| Inertia braking | | yes | yes | yes | yes |
| Options | Spare wheel – Spare wheel support Lashing rails – Lashing rail ring(s) Tailgate max load* – Side door width 60 cm with step | | | | |

* For ref. 39920 and 38930 = 400 kg max * For ref. 38970 and 38960 = 700 kg max * For ref. 38950 = 1000 kg max

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.


THE ACCESSORIES

by *Lider*



ALU & STEEL RAMPS

6 MODELS



NETS

2 MODELS




WHEEL LOCK

1 MODEL

Universal anti-theft device for unhitched trailer

15330



STEEL RAMPS

| FEATURES | 01896 |
|----------------------------|-------|
| Length | 1.50m |
| Profile height | 30mm |
| Clearable height | 80cm |
| Concentrated load per pair | 200kg |
| Width | 20cm |
| Weight per pair | 15kg |



01896

WHEEL LOCK

| FEATURES | 37015 |
|----------------------|-----------------------|
| Dimensions (cm) | 60 x 35 x 22 |
| Buckle strap (cm) | length 60 x width 2.5 |
| Corresponding wheels | 10 to 19 inches |


Please note: not compatible with the motorcycle carrier range



37015



05970

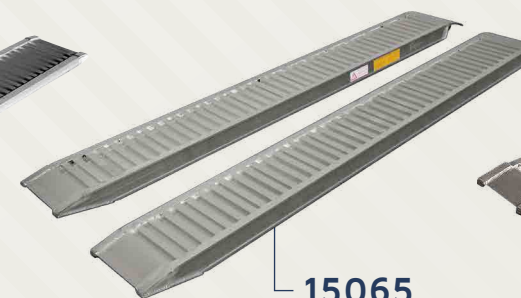

15065




05971

ALUMINIUM RAMPS

| FEATURES | | 05970 | 15065 | 05971 | | 05969 | 15308 |
|---|-------|--------|--------|--------|--------|--------|--------|
| Length | | 2.50m | 2.50m | 2.95m | | 2.50m | 2m |
| Profile height | | 50mm | 85mm | 110 mm | | 72mm | 50mm |
| Clearable height | | 80cm | 80cm | 90cm | | 80cm | 60cm |
| Reach per pair (depending on the wheelbase of the vehicle) | 1m | 1250kg | 2345kg | 3310kg | 0.75 m | 1360kg | - |
| | 1.25m | 1550kg | 3300kg | 3700kg | 1m | 1590kg | 400kg |
| | 1.50m | 2000kg | 3300kg | 3700kg | 1.25m | 1600kg | - |
| Concentrated load per pair | | 750kg | 1285kg | 2050kg | | 1010kg | - |
| Inside width | | 25cm | 22cm | 22cm | | 25cm | - |
| Outside width | | 32cm | 30cm | 30cm | | 31cm | 20cm |
| Weight per pair | | 30kg | 36kg | 50kg | | 28kg | 11kg |
| Profile | | Flat | Flat | Flat | | Flat | Curved |



05969

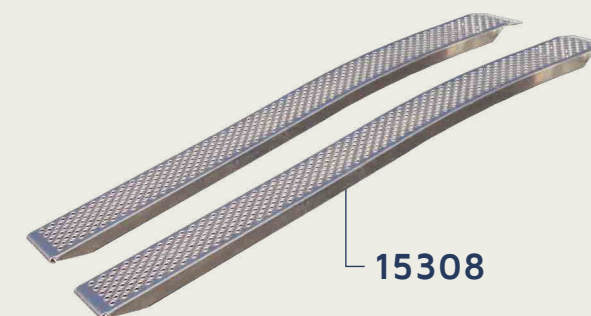

15308



15331



15332

NETS

NEW FOR

| FEATURES | 15331 | 15332 |
|---|-----------|-----------|
| Length | 2.20m | 2.50m |
| Width | 1.50m | 1.60m |
| Mesh (cm) | 5.5 x 5.5 | 5.5 x 5.5 |
| Correspondence with trailers of useful length | ≤ 2.05 m | ≤ 2.50m |

THE ESSENTIALS

ANTI-THEFT DEVICES



15330



05419SP



05695



05696



05169



05173

COUPLING

JOCKEY WHEELS



15333



05064



05148



S05236

+ details on accessories and spare parts available in your spare parts after-sales catalogue

Lider

DESIGN & MANUFACTURE
OF ROAD TRAILERS

Your dealer



15313



www.lider.fr